



SECTIONAL GARAGE DOORS



DESIGN STYLES AND SURFACE FINISHES

PANEL DESIGN



Classic cassette



Universal line



Two rib line



Flat



AVAILABLE COLOURS

STANDARD COLOURS

Due to the printing process, colors may vary.



White RAL9016



Cream RAL1015



Brown RAL8017



Silver RAL9006



Grey RAL7016



Black RAL9017

SPECIAL COLOURS


Due to the printing process, colors may vary.



Teak



Gold oak




Nut brown

SURFACE EMBOSMENT



Woodgrain



Orange skin

WINDOW OPTION



Plain short



Optional top-section window panels available with clear or frosted glazing.

- 1 Assist angle
- 2 Top bracket
- 3 Roller
- 4 Motor
- 5 Torsion spring
- 6 Spring broken device
- 7 Tubular shaft
- 8 Cable drum
- 9 Upper track&horizontal track
- 10 Adjustable hinge
- 11 Middle hinge
- 12 Emergency lock
- 13 Bottom bracket
- 14 Handle
- 15 Vertical track
- 16 Door panel

HARDWARE DESCRIPTION

Door may not open properly if installed near the top, depending on opening dimensions and lift type.



CHOOSE YOUR CONSTRUCTION

The construction and insulation type improves energy efficiency, durability and noise control of the door.

Finger-protectional type



Panel width 430~600mm
Panel thickness: 40mm
Density: $45 \pm 2 \text{ kg/m}^3$
Material: Galvanised steel
Epoxy paint
Foaming: B3 grade PU foam

Industrial Finger-protectional type





Panel width 500mm
Panel thickness: 40mm
Density: $45 \pm 2 \text{ kg/m}^3$
Material: Galvanised steel
Epoxy paint
Foaming: B3 grade PU foam
with 1.0mm thickness reinforcement steel
Sponge seal

GLAXTIC



HOW TO MEASURE

Garage door sizes.

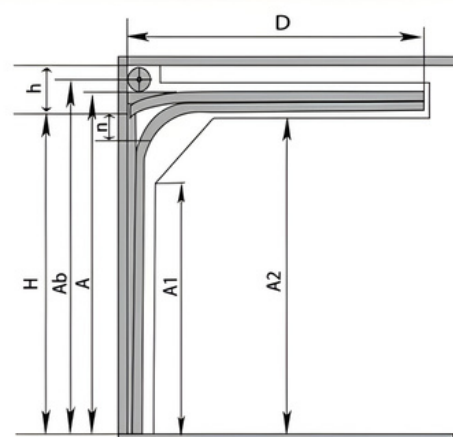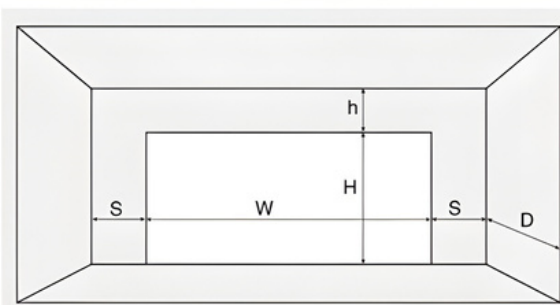


RELIABLE OPERATION

A MODULAR SYSTEM WITH A UNIVERSALLY ADJUSTABLE RAIL SET.


Extension Spring

Headroom min. 150mm (6")
Economic
For little installation space for the garage door.

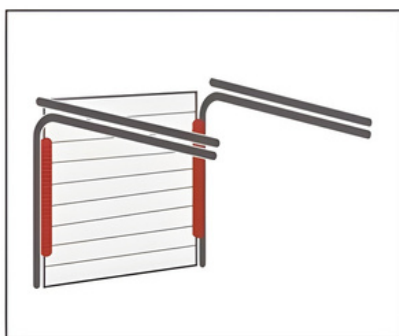


Torsion Spring- Single track

Headroom min.
350mm(14") without L-frame
min.
450mm(18") with L-frame

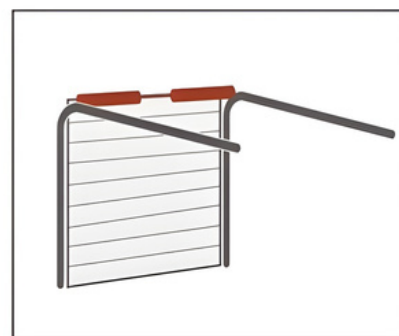


Torsion Spring- Double track

Headroom: general required
250mm(10")
Can adjust if headroom only
200mm(8")

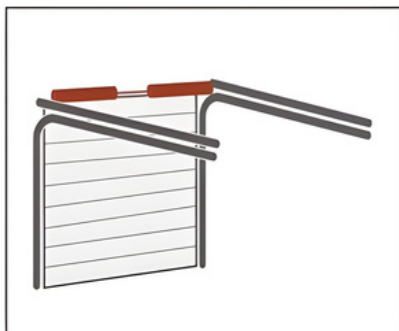

Rear Spring

Headroom min.150mm(6")
Upgrade,Protect and Extend

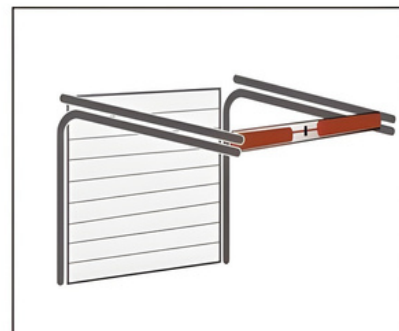

ADDITIONAL OPTIONS

The garage door opener & optional control devices.



Model	M600	M800	M1000	M1500
Rated Current	0.5A	0.7A	0.9A	1.1A
Motor Power	110W	154W	198W	240W
Pull and Push Force	600N	800N	1000N	1500N
Max,Door Area Advised	8m ² -10m ²	10m ² -12m ²	12m ² -14m ²	14m ² -18m ²
Motor Voltage	24V/DC			
Rated Voltage	AC230V/AC120V			
Rated Frequency	50Hz/60Hz			
Ambient Temperature	-20 °C ~ +45 °C			
Rated Operation Time	4min			
Rated Operation Speed	150-180mm/s			
Radio Frequency	433.92MHz			
Remote Control Code	Rolling Code			
Range(In Open Areas)	50m			
Opener Size	343mm*210mm*130mm			
Package Size	450mm*226mm*205mm			

Option:

Chain drive & belt drive
 1/2/3 pcs rail as customer request
 Photocell
 Back-up Battery
 Radar
 Wire Wall Switch
 Wireless Wall Switch
 Code panel



ALUMINUM GLASS GARAGE DOOR

Transparent aluminum alloy sectional door



Glass design




Clear glass



Frosted glass



Mirror glass



Black glass

ALUMINUM GLASS GARAGE DOOR

Transparent aluminum alloy sectional door

Product parameters

Aluminum color	Matte black or white; special colors can be customized
Panel thickness	40mm
Aluminum thickness	2.5mm, 5.0mm
Glass size	Max 3mm
Glass thickness	4.0mm, 5.0mm
Panel weight	16.8 kg/m ²



Product parameters


Color	Black, special colors can be customized
Panel thickness	60mm
Aluminum thickness	3.0mm
Glass size	Max 3mm
Glass thickness	5.0mm
Panel weight	21.5 kg/m ²



Profile



Finger protection type

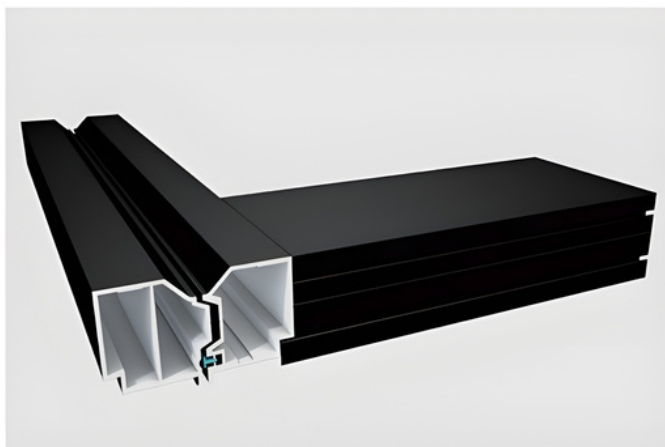

Non finger protection type





CONSIDER AN INDUSTRIAL DOOR

GLAXTIC Product Series



High Speed
Spiral Door



PVC
High Speed Door



Windproof
Rolling Shutter



Industrial Sectional
Door



GOLDVEST TRADING
(THAILAND) CO., LTD



GET IN TOUCH



66 (0) 2738-4939

081-554-5423 (SALES)



goldvestthai.com



sale@goldvestthai.com



**69/60 Moo 6, Soi kingkeaw 54, Kingkeaw Road,
Rachadhava, Bangplee Samutprakarn 10540**

